

BOULONS TÊTE HEXAGONALE | ÉCROUS HEXAGONAUX | ÉCROUS INSERTION DE NYLON | RONDELLES RESSORT DURCIES | RONDELLES DURCIES USS

HEX BOLTS | HEX NUTS | NYLON INSERT LOCK NUTS | LOCK
WASHERS ALLOY THRU-HARDENED |
USS HARDENED WASHERS

1/4 - 5/16 - 3/8 - 7/16 - 1/2


GRADE: 8

FINI/FINISH : Zingué jaune / Yellow zinc

FILET/THREAD : UNC

PAGE 1/2



BOULONS TÊTE HEXAGONALE GR8 ZINGUÉ JAUNE HEX BOLTS GR8 YELLOW ZINC		DIAMÈTRE DIAMETER	GRANDEUR SIZE	QTE QTY
	HB8025001000NCZ	1/4	1	50
	HB8025001500NCZ	1/4	1.1/2	50
	HB8025002000NCZ	1/4	2	50
	HB8025002500NCZ	1/4	2.1/2	50
	HB8031201000NCZ	5/16	1	50
	HB8031201500NCZ	5/16	1.1/2	50
	HB8031202000NCZ	5/16	2	50
	HB8031202500NCZ	5/16	2.1/2	50
	HB8037501000NCZ	3/8	1	50
	HB8037501500NCZ	3/8	1.1/2	50
	HB8037502000NCZ	3/8	2	40
	HB8037503000NCZ	3/8	3	30
	HB8043701500NCZ	7/16	1.1/2	25
	HB8043702000NCZ	7/16	2	25
	HB8043702500NCZ	7/16	2.1/2	15
	HB8043703000NCZ	7/16	3	15
	HB8050001500NCZ	1/2	1.1/2	25
	HB8050002000NCZ	1/2	2	20
HB8050002500NCZ	1/2	2.1/2	15	
HB8050003000NCZ	1/2	3	15	

BOULONS TÊTE HEXAGONALE | ÉCROUS HEXAGONAUX | ÉCROUS INSERTION DE NYLON | RONDELLES RESSORT DURCIES | RONDELLES DURCIES USS

HEX BOLTS | HEX NUTS | NYLON INSERT LOCK NUTS | LOCK
WASHERS ALLOY THRU-HARDENED |
USS HARDENED WASHERS


1/4 - 5/16 - 3/8 - 7/16 - 1/2

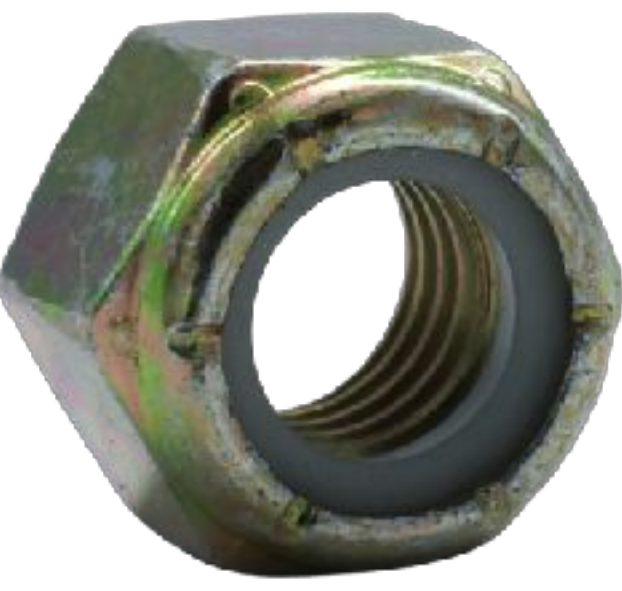
GRADE: 8


FINI/FINISH : Zingué jaune / Yellow zinc


FILET/THREAD : UNC

PAGE 1/2

ÉCROUS HEXAGONAUX GR8 ZINGUÉ JAUNE HEX NUTS GR8 YELLOW ZINC		DIAMÈTRE DIAMETER	QTE QTY
	HN80250NCZ	1/4	100
	HN80312NCZ	5/16	100
	HN80375NCZ	3/8	100
	HN80437NCZ	7/16	50
	HN80500NCZ	1/2	50

ÉCROUS INSERTION DE NYLON GR8 ZINGUÉ JAUNE NYLON INSERT LOCK NUT GR8 YELLOW ZINC		DIAMÈTRE DIAMETER	QTE QTY
	HLN80250NCZ	1/4	100
	HLN80312NCZ	5/16	100
	HLN80375NCZ	3/8	100
	HLN80437NCZ	7/16	50
	HLN80500NCZ	1/2	50

RONDELLES DURCIES NORME USS ZINGUÉES JAUNE 38/45 RC HARDENED USS WASHERS YELLOW ZINC 38/45 RC		GRANDEUR SIZE	DIAMÈTRE EXTÉRIEUR OUTSIDE DIAMETER	DIAMÈTRE INTÉRIEUR INSIDE DIAMETER	ÉPAISSEUR THICKNESS	QTE QTY
	USS80250Z	1/4	0,734	0,313	.055/.065	100
	USS80312Z	5/16	0,875	0,375	.064/.080	100
	USS80375Z	3/8	1,000	0,438	.064/.080	100
	USS80437Z	7/16	1,250	0,500	.064/.080	50
	USS80500Z	1/2	1,375	0,563	.100/.116	50

RONDELLES RESSORT DURCIES GR8 ZINGUÉES JAUNE LOCK WASHER ALLOY THRU-HARDENED GR8 YELLOW ZINC		GRANDEUR SIZE	DIAMÈTRE EXTÉRIEUR OUTSIDE DIAMETER	DIAMÈTRE INTÉRIEUR INSIDE DIAMETER	ÉPAISSEUR THICKNESS	QTE QTY
	LW80250Z	1/4	0,487	0,252/0,260	0,062	100
	LW80312Z	5/16	0,583	0,314/0,322	0,078	100
	LW80375Z	3/8	0,68	0,377/0,385	0,094	100
	LW80437Z	7/16	0,776	0,440/0,450	0,109	50
	LW80500Z	1/2	0,869	0,502/0,512	0,125	50